



RDDSS-2000系列是并排双路脉冲变压器，
可用电压3.3, 5, 12和15V，
该系列变压器用于MIL-STD-1553A/B, MacAir-5690,
 A-5232.A-3818和A-4905，
满足测试MIL-PRF-21038要求。


- **符合标准:**GJB289A-97(中国)和MIL-STD-1553(美国)、
- 企军标:插针类:**Q/RDGC0013A-2015
- 表贴类:**Q/RDGC0014A-2015
- 侧出线:**O/RDGC0015A-2015

RDDSS-3000系列

电参数表

型号 P/N	匝比 TRANS RATIO	初级 PRIMARY	次级 SECONDARY	直流电阻 DC RESISTANCE Ω(MAX)	输出上升时间 OUTPUT RISE TIME (MAX)	阻抗 IMPEDANCE Ω (MIN)		对应 DDC 型号
						75KHz-150KHz	75KHz-150KHz	
RDDSS-3333	1:3.75±3% 1:2.7±3%	1-3 (6-8) 1-3 (6-8)	16-13(12-9) 15-14(11-10)	(1-3), (6-8)=0.35 (16-13), (12-9) 3.0	250 ns	(16-13),(12-9) 3000	(16-13),(12-9) 4000	DSS-3333
RDDSS-3305	1:2.5±3% 1:1.79±3%	1-3 (6-8) 1-3 (6-8)	16-13(12-9) 15-14(11-10)	(1-3), (6-8) 1.0 (16-13), (12-9) 3.5	250 ns	(16-13),(12-9) 3000	(16-13),(12-9) 4000	DSS-3305
RDDSS-3312	1.25:1±3% 1.66:1±3%	1-3 (6-8) 1-3 (6-8)	16-13(12-9) 15-14(11-10)	(1-3), (6-8) 3.2 (16-13), (12-9) 3.0	150 ns	(1-3),(6-8) 3000	(1-3),(6-8) 4000	DSS-3312
RDDSS-3315	1.4:1±3% 2:1±3%	1-3 (6-8) 1-3 (6-8)	16-13(12-9) 15-14(11-10)	(1-3), (6-8) 3.5 (16-13), (12-9) 3.0	150 ns	(1-3),(6-8) 5000	(1-3),(6-8) 7200	DSS-3315
RDDSS-3330	1:2.63±3% 1:2.07±3%	1-3 (6-8) 1-3 (6-8)	16-13(12-9) 15-14(11-10)	(1-3), (6-8) 0.29 (16-13), (12-9) 1.10	250 ns	(16-13),(12-9) 2000	(16-13),(12-9) 4000	DSS-3330

封装图

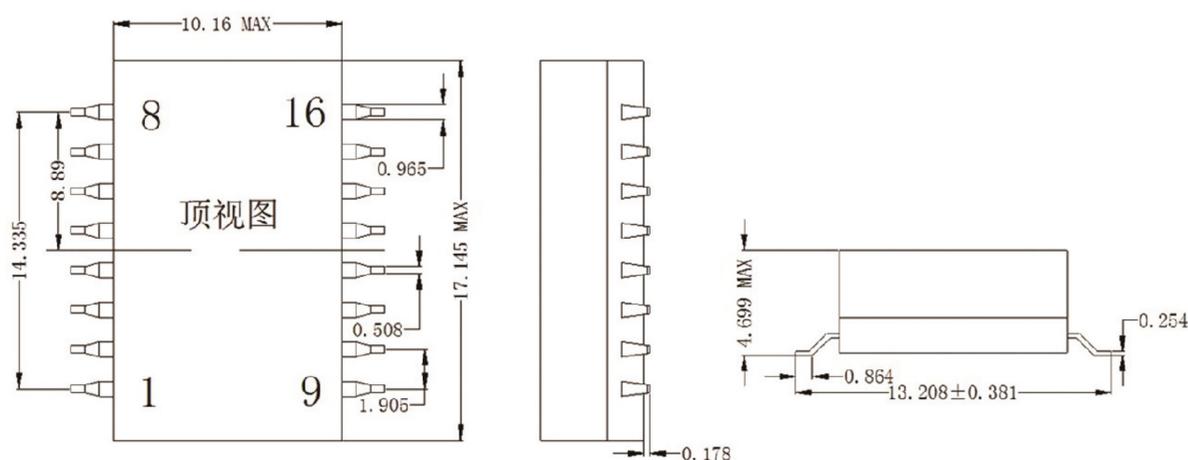

电原理图

