


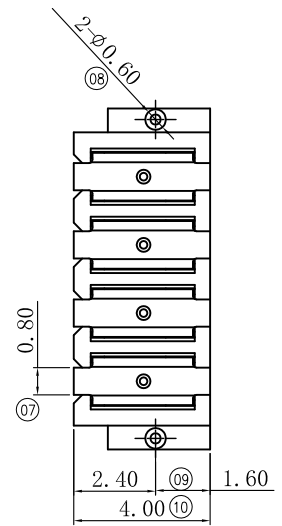


REV.	Q'TY	ECN. NO.	APR.	DATE

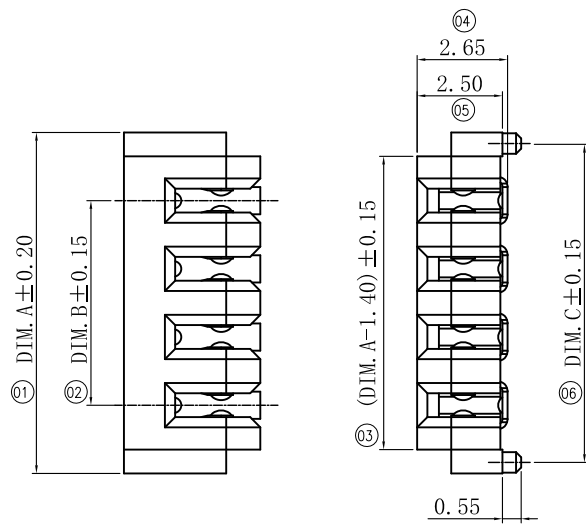


TABLE

PIN	MIN-A	MIN-B	MIN-C
3 PIN	8.00	4.00	7.35
4 PIN	10.00	6.00	9.35
5 PIN	12.00	8.00	11.35
6 PIN	14.00	10.00	13.35
7 PIN	16.00	12.00	15.35
8 PIN	18.00	14.00	17.35
9 PIN	20.00	16.00	19.35
10 PIN	22.00	18.00	21.35

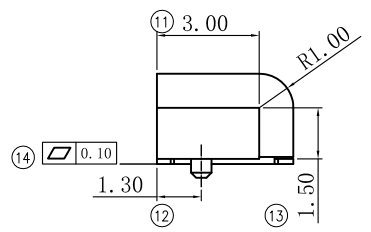

- (1) 材料: 塑胶LCP130I; 五金C9191-H 镀金
- (2) 额定电压: AC/DC 30V Max
- (3) 绝缘耐压: AC 500V 1 MINUTE 无损伤
- (4) 绝缘电阻: DC 500V 1 MINUTE , 500MΩ MIN
- (5) 操作温度: -20° TO +80°

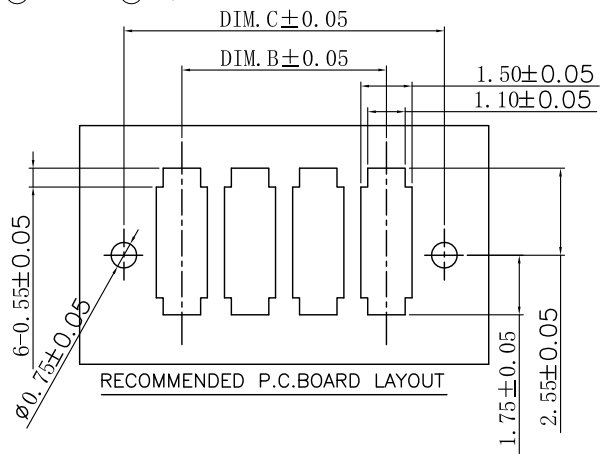

DIMENSION IN mm		东莞市协展电子科技有限公司	
TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE: Battery 2.0 PITCH H=2.5 系列贴片母座	
.X±0.10	X.*±1.5°	APR.	PROJ.
.XX±0.05	.X.*±1.0°	CHK.	
.XXX±0.03	.XX.*±0.5°	DRA.	
		SIZE A4	SHEET 2/2
		SCALE 1:1	REV. A