


HALOGEN
FREERoHS
Compliant
2002/95/EC

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
01	ECN NO.	INITIAL RELEASED	2021.07.23	LJY








NOTES:

1.PRODUCT SPECIFICATIONS:

- 1.1. CURRENT RATING: 1.5A/PIN MAX(A4,A9,B4,B9)
1.25A/PIN MAX(A1,A12,B1,B12),0.25A(OHER PIN)
- 1.2. TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- 1.3. CONTACT RESISTANCE: 30 MILLIONHM MAX
- 1.4. INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 1.5. DIELECTRIC WITHSTANDING VOLTAGE:100 VAC
- 1.6. INSERTION FORCE : 5N~20N
- 1.7. UNMATING FORCE:INITIAL: 8N~20N;DURABILITY: 6N~20N
- 1.8. DURABILITY: 10,000 CYCLES



Welding spot: Height<0.05mm,Pulling force>10kgf

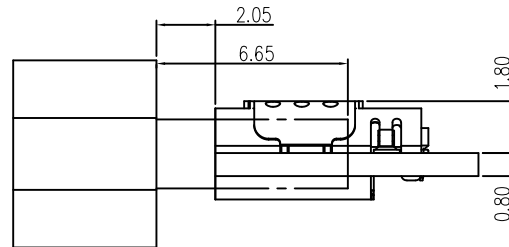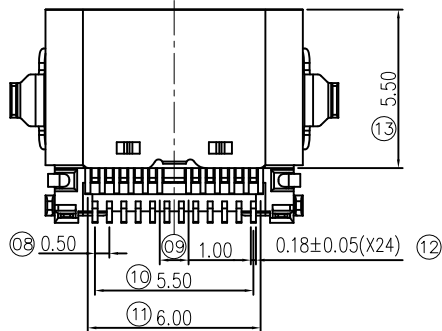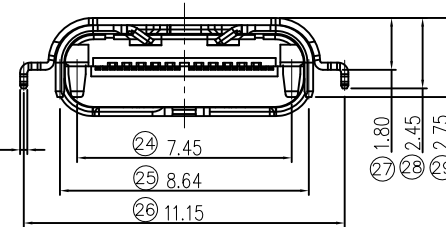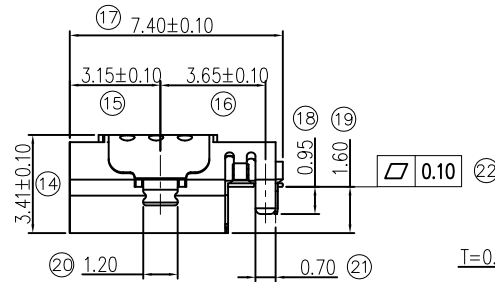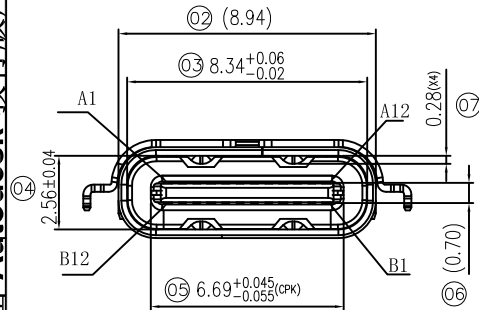






MOUTING CONDITION (REF.)

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	东莞市协展电子科技有限公司		
X.X ± 0.30	X.* $\pm 10^{\circ}$	PART NO.	TITLE:		
.XX ± 0.20	.X* $\pm 8^{\circ}$	YCF014-1E1H1A115-OHR	TYPE C 24PIN 沉板1.60 双壳款 L=7.40		
.XXX ± 0.10	.XX* $\pm 5^{\circ}$		DRAWG NO.		
UNITS	mm	DESIGN: DRAW	M10Plus(A13)		
MATERILA		CHED:		SCALE	SHEET
FINISH		APPD:		1:1	1/3
					REV. 01

HALOGEN FREE



REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
01	ECN NO.	INITIAL RELEASED	2021.07.23	LJY

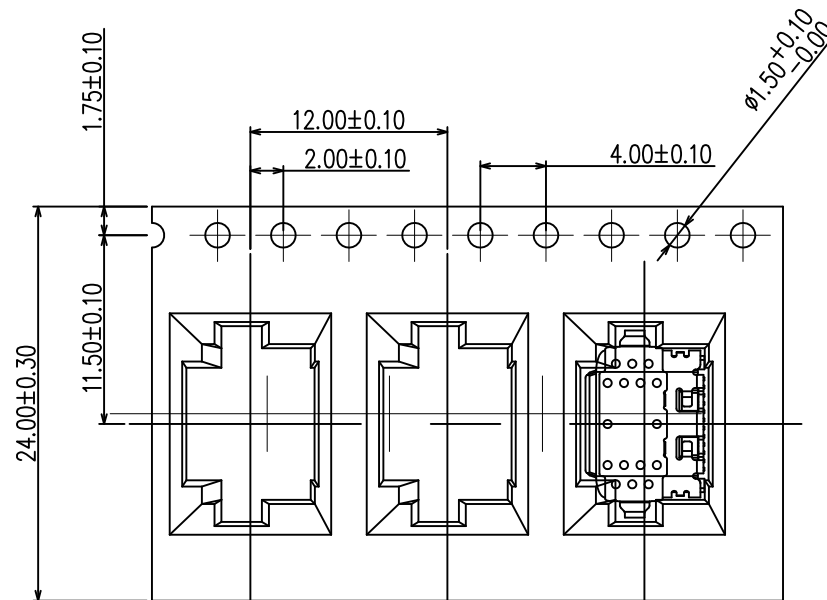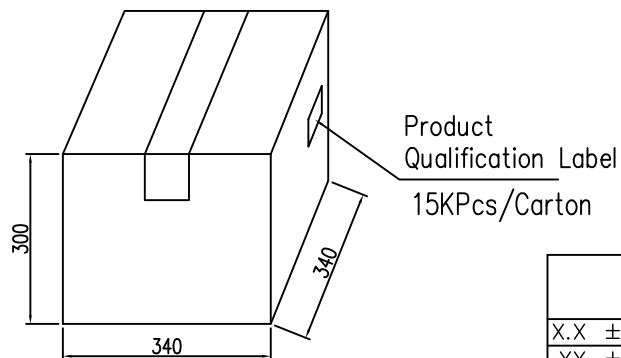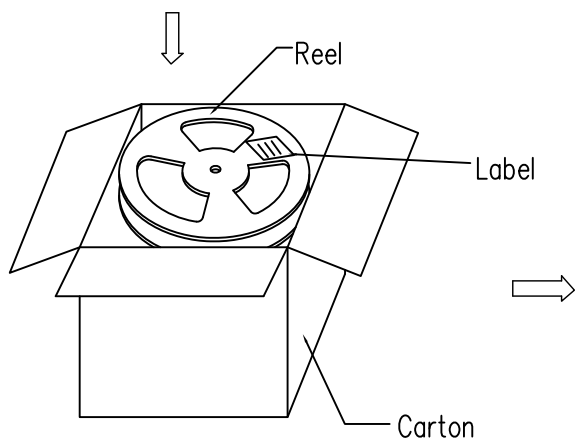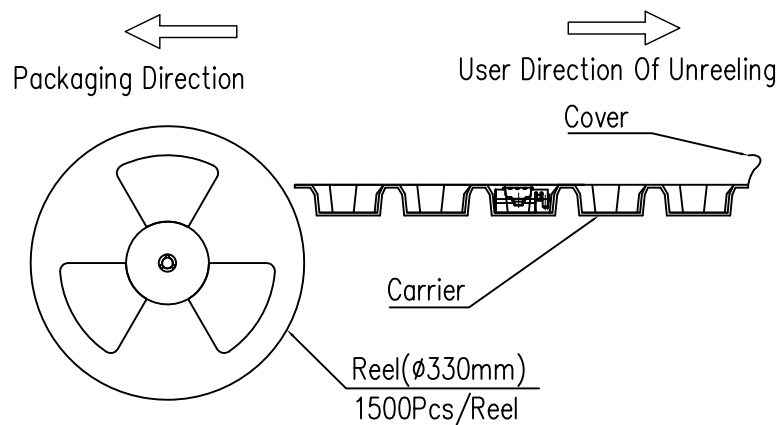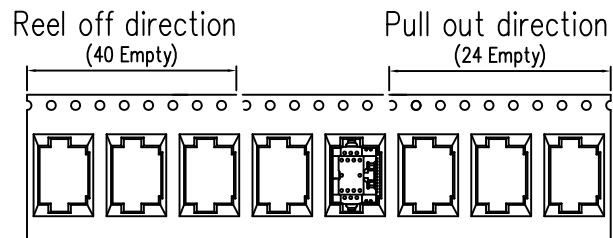

NOTES:

- 1,Tape Reel Material:PET Transparent
- 2,Package Content: See Tab below

TABLE A :

PCS/REEL	REEL/CARTON	QTY/CARTON	CARTON SIZE/MM
1500	10 REEL	15000 PCS	340*340*300

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	东莞市协展电子科技有限公司		
X.X ±0.30	X.* ±10°	PART NO.	TITLE:		
.XX ±0.20	.X* ± 8°	YCF014-1E1H1A115-OHR	TYPE C 24PIN 沉板1.60 双壳款 L=7.40		
.XXX ±0.10	.XX* ± 5°		DRAWG NO.		
UNITS	mm	DESIGN: DRAW	M10Plus(A13)		
MATERILA		CHED:		SCALE	SHEET
FINISH		APPD:		1:1	3/3
				REV.	01