由 Autodesk 教育版产品制作

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行			2018.11.05



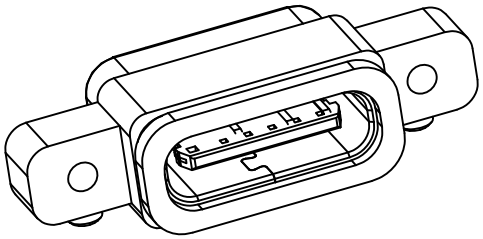

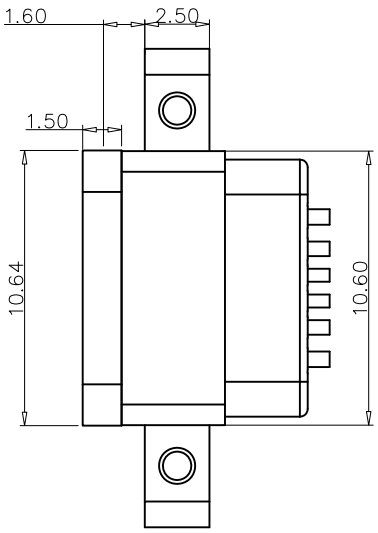

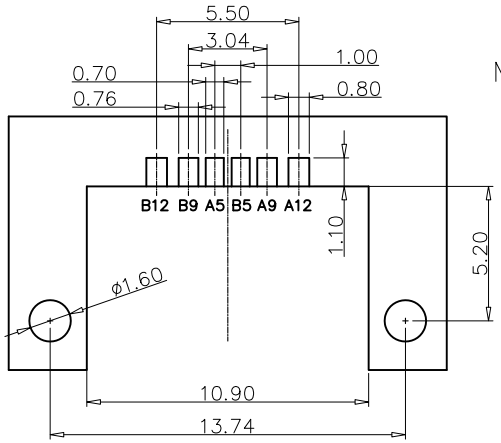

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 ℃ ~ 85 ℃
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THISPRODUCTIS BASED ON IPX7.

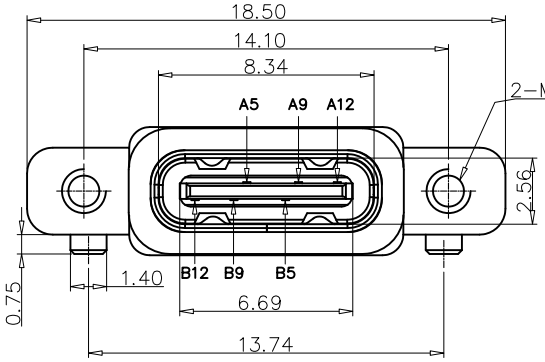

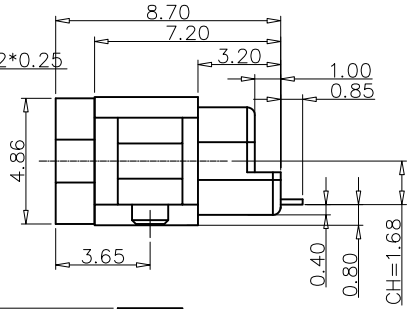

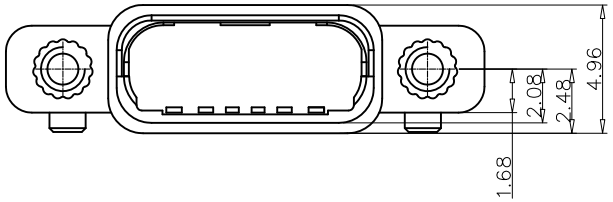

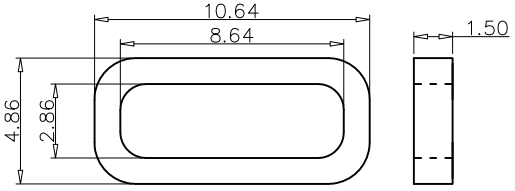

建议的胶圈尺寸

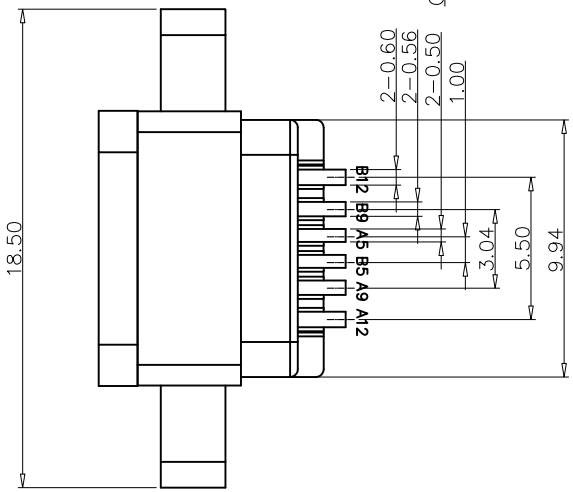

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	东莞市协展电子科技有限公司	
X.X ±0.30	X.° ± 2°	PART NO.	TITLE: TYPE-C 6PIN带双耳螺丝孔防水母座	
.XX ±0.20	.X° ± 1°			
.XXX ±0.10	.XX° ±0.5°			
UNITS	mm	APPD: DMX	DRAWG NO. AA0-078	
MATERILA		CHED: TANG	SCALE 1:1	SHEET 1/1 REV. A
FINISH		DRAW: SHI		

由 Autodesk 教育版产品制作