由 Autodesk 教育版产品制作

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

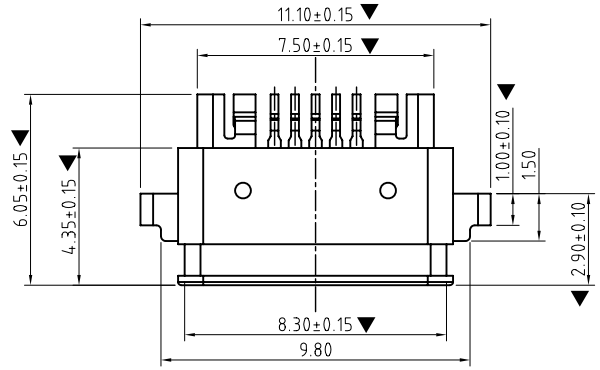



Notes:

1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ▽ & ▼ should be checked by Q.C. and process, engineers and ▽ should also check the CPK data.

Specification:

1. Current Rating: 1.0 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 mΩ Max.
5. Insulator Resistance: 500MΩ Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -20°C to +60°C

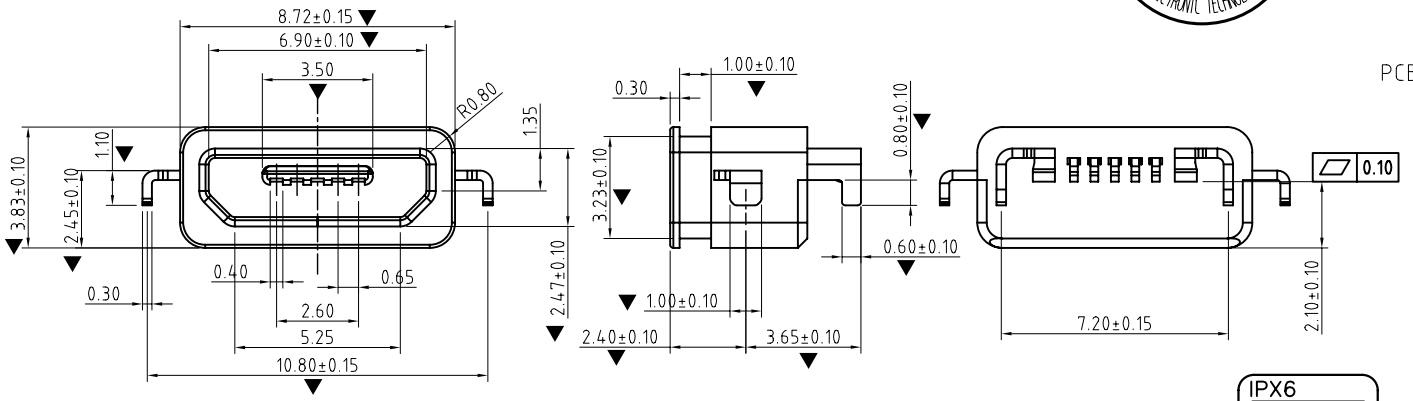

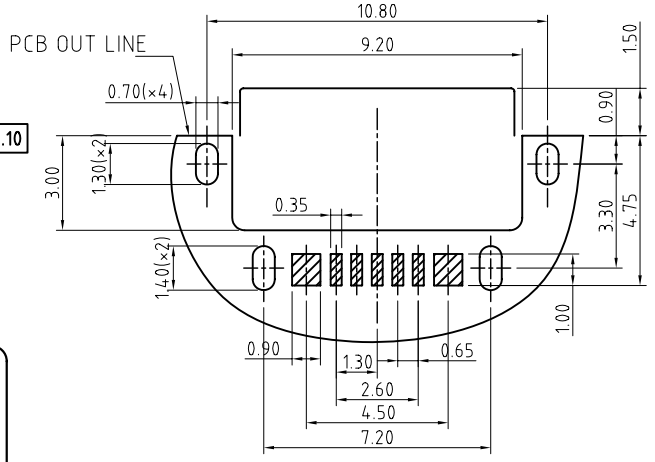

P.C.B LAYOUT

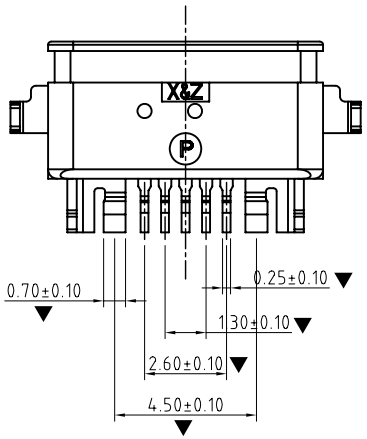

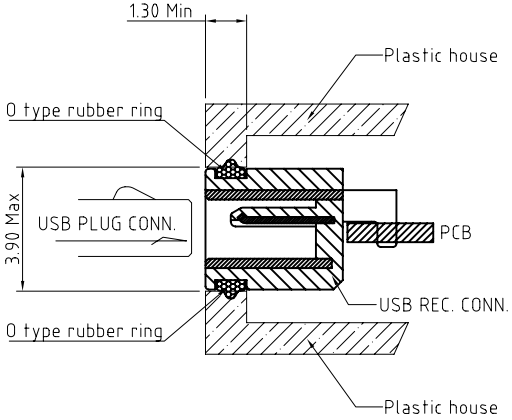

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS304R-1/2H Ti/Ni PlatingT=0.30mm	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA9T&LCP (G.F30%) Black	

X. ±0.50	X.° ±2°	UNITS mm	协展电子科技有限公司 Xie Zhan Electronic Technology Co., Ltd
.X ±0.30	.X° ±1°		
.XX ±0.10	.XX° ±0.5°	MAT'L	PART NO. (INTENDED USE)
.XXX ±0.05			TITLE: Micro USB 5Pin SMT Type (B Type 沉板平口防水型 IP66)
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XIE ZHAN ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPROUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XIE ZHAN ELECTRONIC TECHNOLOGY CO., LTD		FINISH	APPD:
		Q'TY	CHKD:
			DR: Steven.Xie 2016/08/19

DWG NO.: X13 USB

SCALE	SHEET	REV.
SCALE	1/3	A1

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

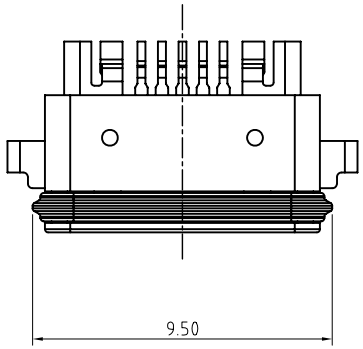



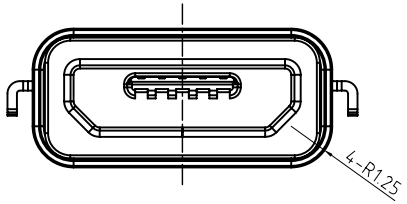



X. ±0.50	X.° ±2°	UNITS mm	协展电子科技有限公司 Xie Zhan Electronic Technology Co., Ltd
.X ±0.30	.X° ±1°		
.XX ±0.10	.XX° ±0.5°	MAT'L	PART NO. (INTENDED USE)
.XXX ±0.05			TITLE: Micro USB 5Pin SMT Type (B Type 沉板平口防水型)
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XIE ZHAN ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XIE ZHAN ELECTRONIC TECHNOLOGY CO., LTD		FINISH	APPD:
		Q'TY	CHKD:
			DR: Steven.Xie 2016/08/19

DWG NO.: X13 USB

SCALE	SHEET	REV.
SCALE	2/3	A1

由 Autodesk 教育版产品制作