

保修说明

请妥善保管此保修卡及有效购买凭证，于产品故障送修时一并出示，或您无法提供保修卡（需加盖经销商有效公章）或相关购买凭证，则产品保修期起算日将以产品上的出厂日期为准。

服务条例

1. 质保服务：产品自出售之日起，在正常使用情况下，若产品出现品质故障用户可以在购买七天内申请退货，一年内提供保修服务。若属于下列原因，恕不提供保修服务：

1. 不能出示有效保修卡原件和有效发票或收据，或者机身条码、保修日期贴纸撕毁或损坏。
2. 购买产品日期、销售单位名称（盖章有效）等项目未能完整填写或涂改保修卡。
3. 一切人为因素损坏、包括非正常工作环境下使用所导致的故障和损坏。
4. 未经许可对产品进行改造、分解、组装或维修而发生的故障。
5. 产品缺少配件，如无产品品质保贴及其他相关配件。
6. 除正常使用所产品的电器性能故障外，如果外观损坏，只能享受维修服务。

保修凭证

顾客姓名：_____ 购买型号：_____

电话或地址：_____

经销商（盖章）：_____

维修记录：_____

运营商：香港飞翔科技集团有限公司

制造商：深圳市宝安区智源电子厂 地址：深圳市宝安区5区前进路

Operator: Motospeed Technology Group Limited

Manufacturer: Mototech Technology Group Limited

Address: Qianjin Road, 5th District, Bao'an Shenzhen P.R. China

HOTLINE: 4008-860-368

以上数据仅供参考，实物与图片可能不相符！

最终解释权归本公司所有

WWW.DARMOSHARK.CN


DARMOSHARK

M3S Game Mouse

QUICK START GUIDE



Darmoshark

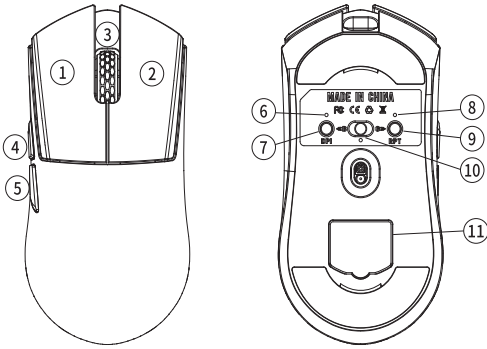

- | | |
|-------------------------------|-------------|
| 1. Left button | 1. 左键 |
| 2. Right click | 2. 右键 |
| 3. Middle key | 3. 中键 |
| 4. Forward key | 4. 前进键 |
| 5. Backspace | 5. 后退键 |
| 6. DPI indicator | 6. DPI指示灯 |
| 7. DPI key | 7. DPI键 |
| 8. Rate of return indicator | 8. 回报率指示灯 |
| 9. Return key | 9. 回报率键 |
| 10. Three section mode switch | 10. 三段模式开关 |
| Left dial Bluetooth | 左拨蓝牙 |
| Intermediate off | 中间OFF |
| Right dial 2.4g | 右拨2.4G |
| 11. Built in 1K receiver | 11. 内置1K接收器 |

中文

尺寸: 123X63X38MM

本体重量: 53±2G

寿命: 60,000,000times(次)

加速度: 50g

DPI: 400/800/1600/3200/4800

English

Size: 123X63X38MM

Body weight: 53±2G

Life: 60,000,000times (times)

Acceleration: 50g

DPI: 400/800/1600/3200/4800

España

Tamaño: 123X63X38MM

Peso corporal: 53±2G

Vida: 60,000,000 veces (veces)

Aceleración: 50g

DPI: 400/800/1600/3200/4800

Türk dili

Boyut: 123X63X38MM

Vücut ağırlığı: 53±2G

Hayat: 60.000.000 kez (kez)

Hızlandırma: 50g

DPI: 400/800/1600/3200/4800

Português

Tamanho: 123X63X38MM

Peso corporal: 53±2G

Vida: 60.000.000 vezes (vezes)

Hızlandırma: 50g

DPI: 400/800/1600/3200/4800

українська

Розмір: 123X63X38MM

Маса тіла: 53±2G

Життя: 60 000 000 разів (разів)

Прискорення: 50g

DPI: 400/800/1600/3200/4800

Ελληνικ ά

Μέγεθος: 123X63X38MM

Σωματικό βάρος: 53±2G

Ζωή: 60.000.000 φορές (φορές)

Επιτάχυνση: 50g

DPI: 400/800/1600/3200/4800

Deutsch

Größe: 123X63X38MM

Körpergewicht: 53±2G

Leben: 60.000.000mal (mal)

Beschleunigung: 50g

DPI: 400/800/1600/3200/4800

Polska

Rozmiar: 123X63X38MM

Masa ciała: 53±2G

Życie: 60,000,000times (razy)

Przyspieszenie: 50g

DPI: 400/800/1600/3200/4800

SYSTEM REQUIREMENTS:

Wired and 2.4G modes: WinXP/Win7/Win8/Win10/Win11/Macos

Bluetooth mode: Win8/Win10/Win11/Macos

系统要求

有线和2.4G模式: WinXP/Win7/Win8/Win10/Win11/Macos

蓝牙模式: Win8/Win10/Win11/Macos

电气参数

最高分辨率:26000DPI(驱动可设置)

DPI出厂默认设置:5段DPI循环调节:400红,800蓝(默认),1600绿,3200紫,4800黄

有线/2.4G回报率(1K):底部按键可调:红灯125HZ,蓝灯500HZ(默认),绿灯1000HZ

2.4G回报率(2K):底部按键可调:红灯125HZ,蓝灯500HZ(默认),绿灯1000HZ,紫灯2000HZ

有线回报率(2K):底部按键可调:红灯125HZ,蓝灯500HZ(默认),绿灯1000HZ

蓝牙回报率:默认125HZ不可调

1K模式SPI采样时间:1ms

2K模式SPI采样时间:0.5ms

FPS图像处理:26000fps

最大速度:650ips

工作电压:USB有线:DC5V±5% 无线:DC3.7V

底部sensor光:红外光

线材长度:线材总长:2M±1%

电脑连接方式

无线模式即插即用,有线无线同时使用的状态下,优先识别为有线模式

休眠唤醒

放停5秒后,进入一级休眠模式;放停60秒后,进入二级休眠模式。

休眠模式下,点击或者移动都可唤醒鼠标。

充电指示

当数据线连接时,滚轮位置指示灯为红色常亮,表示在充电,充满后熄灭或者回到灯效。

(充电时间大约3-5小时)注意:本产品最高支持DC5V充电电压,300MA充电电流,因不当充电而导致的问题,概不负责。

低电指示

滚轮位置指示灯黄色闪烁时,为低电提示,需要充电才能保证鼠标正常使用

(根据实际情况略有偏差)

2.4G和蓝牙模式指示灯

底部三段开关拨到G图标时,滚轮位置绿灯长亮三秒熄灭。

底部三段开关拨到B图标时,滚轮位置蓝灯长亮三秒熄灭(前提是蓝牙连接成功)。

蓝牙配对操作

底部三段开关拨到B图标时,同时按下左中右键,滚轮位置蓝灯闪烁,进入配对状态,

此时需要打开蓝牙设备搜索到M3S Mouse才能配对,连接成功后,指示灯熄灭。

滚轮灯效

同时按下中键+前进(调节模式:常亮,呼吸,混彩,关闭)

同时按下中键+后退(调节常亮,呼吸模式下的颜色)

1K和2K接收器相互切换

同时按下中键+右键三秒,滚轮白灯提示闪烁2次。

2.4G配对操作

底部三段开关拨到G图标时,同时按下左中右键,滚轮位置绿灯闪烁,进入配对状态,

此时需要插入接收器,连接成功后,指示灯熄灭。

(注意:出厂已配对OK,如2.4G无功能的情况下,可以按照此步骤操作)

锂电池容量

容量500MAH

1K模式续航约80小时

2K模式续航约65小时

以上数据为工程测试模式,根据实际使用环境略有偏差

DPI/回报率指示灯

长亮三秒熄灭

光电IC

PAW3395

驱动

仅支持Windows系统

无线传输距离

办公室环境实测距离约10米

工作条件

温度:-10°C—50°C

湿度:10-90%RH

2K接收器使用说明

可查看电量指示灯:绿色灯约90% 蓝色灯约60% 红色灯约30%

(注意:红灯提示时,鼠标需充电才能正常使用)

为了获得最佳的无线体验,建议将2K接收器放置靠近鼠标10CM操控,


以降低延迟率和更少的干扰信号。



1K接收器使用说明

为了获得最佳的无线体验,建议将1K接收器插入线材+赠送的转接头,放置靠近鼠标10CM操控,

以降低延迟率和更少的干扰信号。



以上图片仅供参考,请以实物为标准

Electrical parameters

Highest resolution: 26000DPI (drive can be set)

DPI factory default settings: 5 segments DPI cycle adjustment: 400 red, 800 blue (default),

1600 green, 3200 purple, 4800 orange

Wired/2.4G rate of return(1K): bottom button is adjustable: Red light 125HZ, blue light 500HZ

(default), green light 1000HZ

Wired/2.4G rate of return(2K): bottom button is adjustable: Red light 125HZ, blue light 500HZ

(default), green light 1000HZ, purple light 2000HZ

Bluetooth return rate: 125HZ is not adjustable by default

1K SPI sampling time: change synchronously with the return rate: 8ms/2ms (default)/1ms

2K SPI sampling time: change synchronously with the return rate: 8ms/2ms (default)/1ms

FPS image processing: 26000fps

Maximum speed: 650ips

Working voltage: USB wired: DC5V ± 5% wireless: DC3.7V

Working current: USB wired:<50MA Wireless: light is always on<15MA, no light<9MA

Bottom sensor light: infrared light

Wire length: total wire length: 2M ± 1%

Computer connection mode

Wireless mode is plug and play. When wired and wireless are used at the same time

wired mode is preferred

Sleep Wake Up

After 5 seconds of release and stop, it will enter the first level sleep mode; After 60 seconds

of release and stop, it will enter the secondary sleep mode.

In sleep mode, click or move to wake the mouse.

charge indicator

When the data cable is connected, the roller position indicator is steady red, indicating

that after charging, it is turned off or returned to the light effect.

(Charging time is about 3-5 hours) Note: This product supports up to DC5V charging

voltage, 300MA charging current, We are not responsible for any problems caused by

Low power indication

When the wheel position indicator flashes in yellow, it indicates low power, and charging is

required to ensure the normal use of the mouse (Slight deviation according to actual use)

2.4G and Bluetooth profile indicator

When the bottom three section switch is turned to the G icon, the green light at the wheel

position will stay on for three seconds and go out.

When the bottom three section switch is turned to the B icon, the blue light at the wheel

position will stay on for three seconds and go out

(provided that the Bluetooth connection is successful).

Bluetooth pairing operation

When the bottom three section switch is turned to the B icon, press the left, middle and right

buttons at the same time, and the blue light of the wheel position flashes to enter the pairing

state. At this time, you need to open the Bluetooth device to search for M3S Mouse before

pairing. After the connection is successful, the indicator light goes out.

Roller light effect

Press the middle button + Forward at the same time (adjustment mode: Steady on, breathe,

mix color, off)

Press the middle button+Back at the same time (adjust the color in steady on, breathing mode)

1K and 2K receivers switch between each other

Press the middle button + right button at the same time for three seconds, the scroll

wheel white light prompt blinks 2 times.

2.4G pairing operation

When the bottom three section switch is turned to the G icon, press the left, middle and right

buttons at the same time, and the green light of the scroll wheel position flashes to enter the

pairing state. At this time, the receiver needs to be inserted. After the connection is successful,

the indicator light will go out.

(Note: It is OK to pair with each other in the factory. If the 2.4G has no function, this step can be

followed)

Lithium battery capacity

Capacity 500MAH

1K mode for about 80 hours of continuous use

2K mode for about 65 hours of continuous use

The above data is the wireless 2.4G 2KHZ return rate engineering test mode, according to the

actual use of the environment slightly deviated

DPI/Return Indicator

On for three seconds and off

Photoelectric ic

PAW3395

drive

Windows systems only

Wireless transmission distance

Measured distance of office environment is about 10m

Working conditions

Temperature: - 10 °C - 50 °C

Humidity: 10-90% RH


2K Receiver Instructions

Can check the power indicator: green light about 90% blue light about 60% red light about 30%

(Note: when the red light prompt, the mouse needs to be charged to use normally)

In order to get the best wireless experience, it is recommended to place the 2K receiver close to

the mouse 10CM manipulation. to reduce the delay rate and less interference signal.



The above pictures are for reference only, please take the real thing as the standard

1K Receiver Instructions

For the best wireless experience, it is recommended that the 1K receiver be plugged into

the cable + complimentary adapter, placed close to the mouse 10CM control

to reduce the latency rate and less interference with the signal.

