




Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$ **500A**
 V_{DRM}/V_{RRM} **1100~1800V**
 I_{TSM} **11 kA**
 I^2t **605 $10^3 A^2S$**

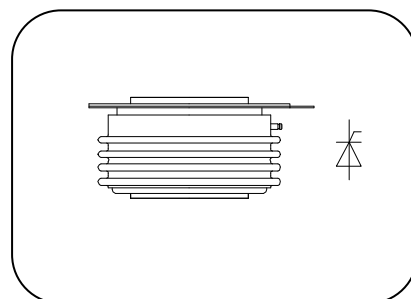

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _J (°C)	VALUE			UNIT
					Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz Double side cooled	T _C =70°C			500	890	
V _{DRM} V _{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms		125	1100		1800	V
I _{DRM} I _{R RM}	Repetitive peak current	at V _{DRM} at V _{RRM}		125			40	mA
I _{TSM}	Surge on-state current	10ms half sine wave		125			11	kA
I ² t	I ² t for fusing coordination	V _R =0.6V _{RRM}					605	A ² s*10 ³
V _{TO}	Threshold voltage			125			0.85	V
r _T	On-state slope resistance						0.42	mΩ
V _{TM}	Peak on-state voltage	I _{TM} =1500A, F=15kN		25			2.00	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}		125			1000	V/μs
di/dt	Critical rate of rise of on-state current	V _{DM} = 67%V _{DRM} , I _{TM} =(2~3)I _{TAV} , t=5s, Gate pulse t _r ≤0.5μs I _{GM} =1.5A f=50Hz		125			100	A/μs
Q _{rr}	Recovery charge	I _{TM} =1000A,tp=1000μs, di/dt=-20A/μs, V _R =100V		125		1100		μC
I _{GT}	Gate trigger current	V _A =12V, I _A =1A		25	35		300	mA
V _{GT}	Gate trigger voltage				0.8		2.5	V
I _H	Holding current				20		250	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =0.67V _{DRM}		125			0.3	V
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force15kN					0.035	°C /W
R _{th(c-h)}	Thermal resistance case to heatsink						0.008	
F _m	Mounting force				10		20	kN
T _{stg}	Stored temperature				-40		140	°C
W _t	Weight					260/320		g
Outline	KT40cT/KT45cT							

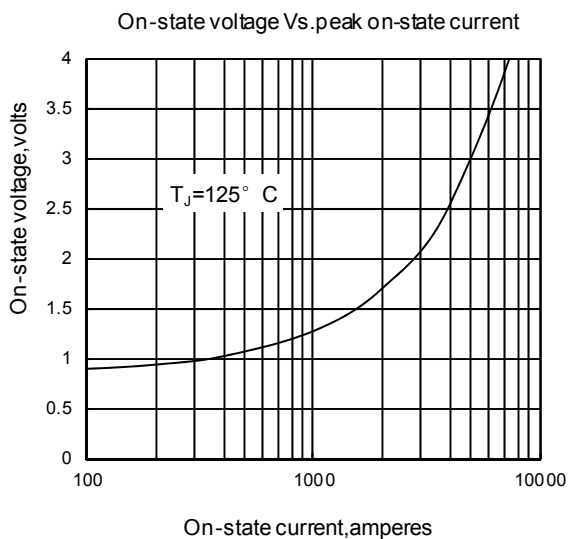


Fig1

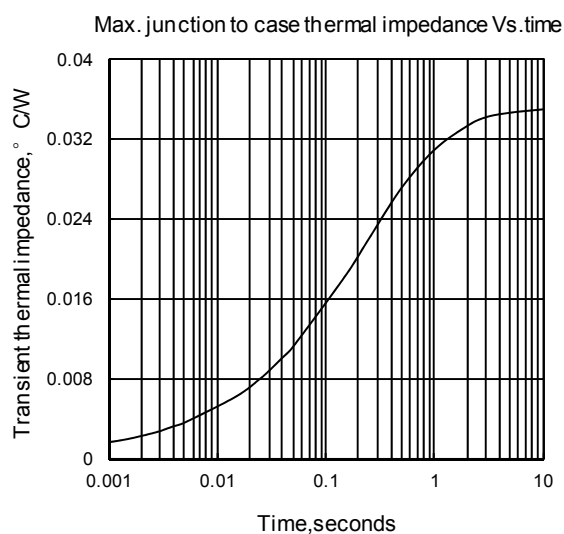


Fig2

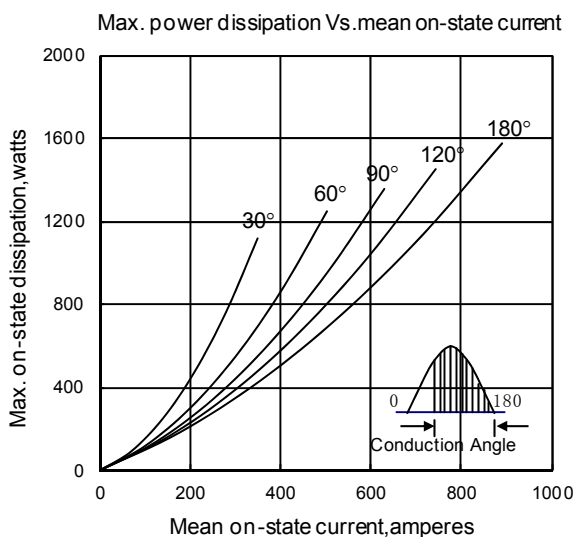


Fig3

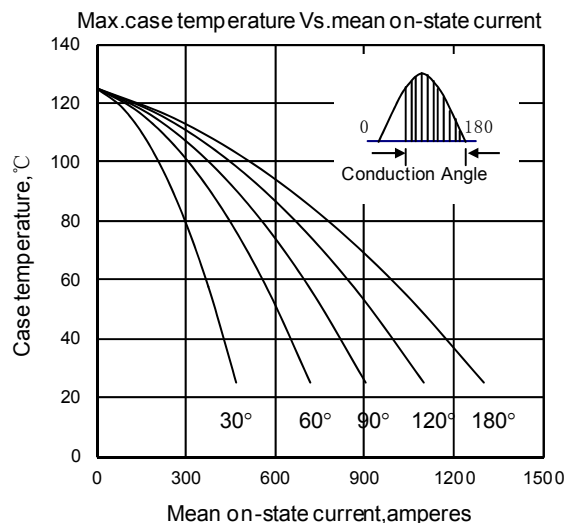


Fig4

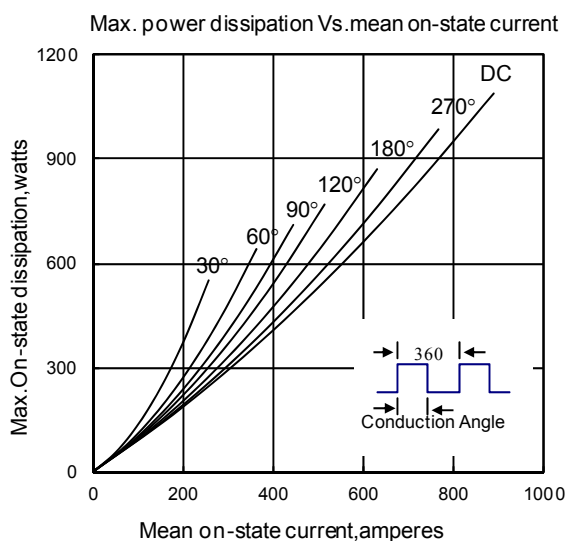


Fig5

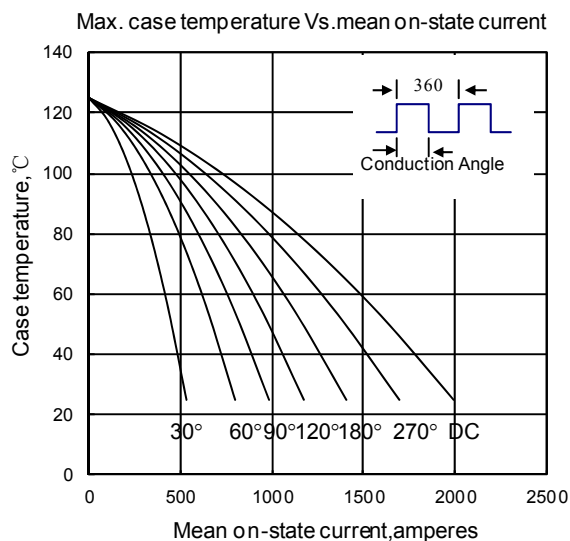


Fig6

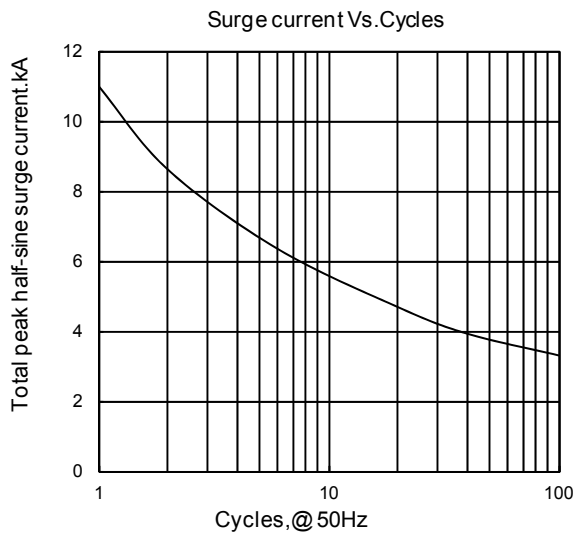


Fig7

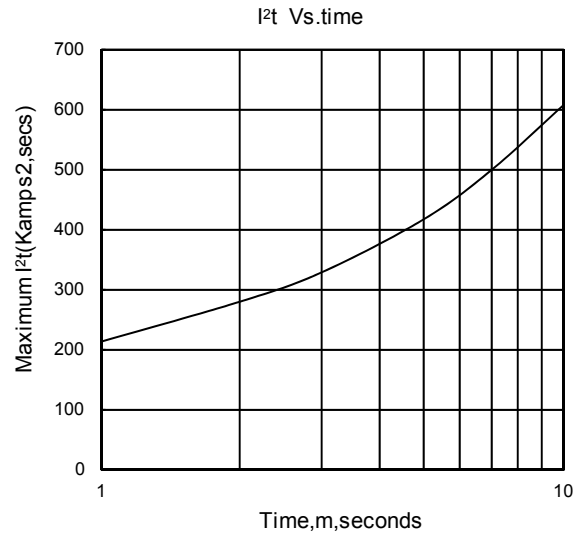


Fig8

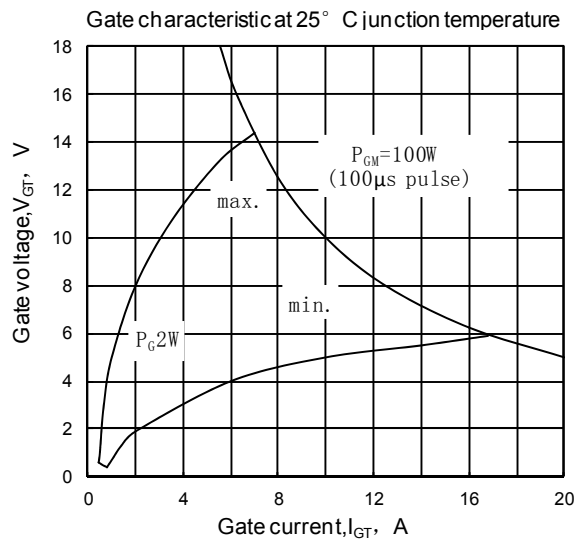


Fig9

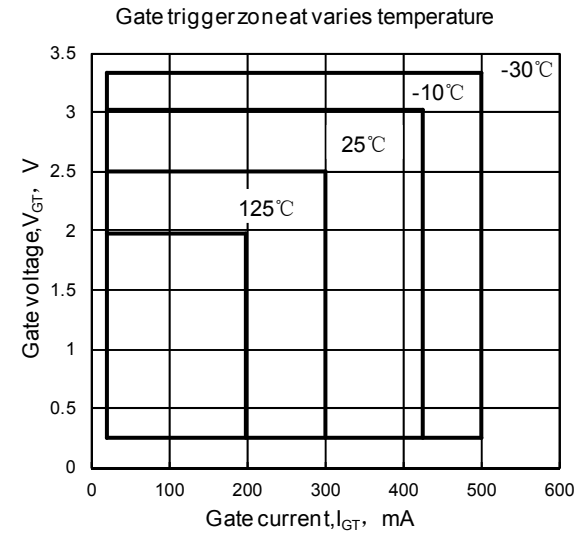


Fig10

Outline:

图4-KT40cT

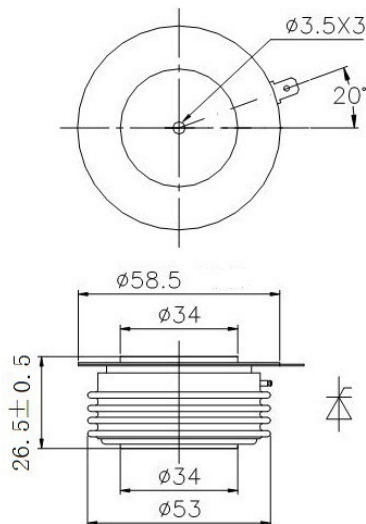


图6-KT45cT

